

# NEOSTAR

3S+60 Dual-Glass Module

515W-540W

## Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values
-  Infinite Technology



red dot winner 2023

Warranty partner



Product Warranty



Performance Warranty

IEC61215/IEC61730  
IEC61701/IEC62716

ISO9001:ISO Quality Management System  
ISO14001:ISO Environmental Management System  
ISO14064:Greenhouse Gas Verification Statement  
ISO45001:ISO Occupational Health and Safety Management System



**540W**  
Output

**24.4%**  
Efficiency

**≤1%**  
First-year Degradation

**≤0.35%**  
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

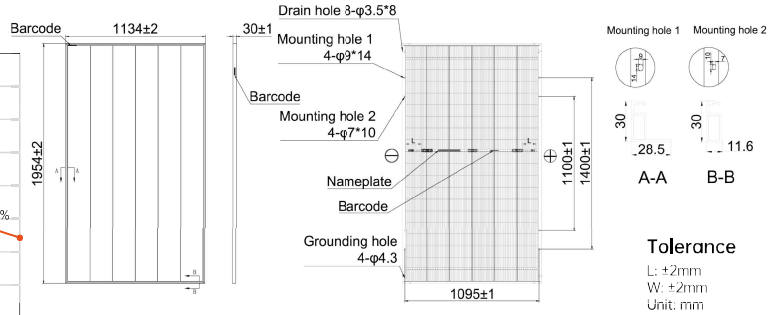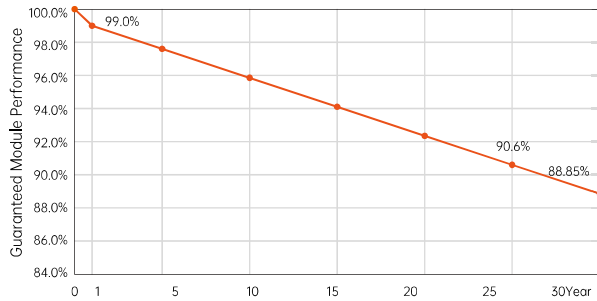

**Tolerance**  
L: ±2mm  
W: ±2mm  
Unit: mm

电性能参数 (STC: AM1.5 1000W/m<sup>2</sup> 25°C NOCT: AM1.5 800W/m<sup>2</sup> 20°C 1m/s)

Power Tolerance: 0~ + 3%

Module Type	AIKO-A515-MCE60Db			AIKO-A520-MCE60Db			AIKO-A525-MCE60Db			AIKO-A530-MCE60Db			AIKO-A535-MCE60Db			AIKO-A540-MCE60Db		
	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
P <sub>max</sub> [W]	515	390	545	520	394	550	525	398	555	530	402	560	535	405	565	540	409	570
V <sub>oc</sub> [V]	45.10	42.79	45.10	45.20	42.88	45.20	45.30	42.98	45.30	45.40	43.07	45.40	45.50	43.17	45.50	45.60	43.26	45.60
V <sub>mp</sub> [V]	37.90	35.96	37.90	38.00	36.05	38.00	38.10	36.15	38.10	38.20	36.24	38.20	38.30	36.34	38.30	38.40	36.43	38.40
I <sub>sc</sub> [A]	14.66	11.85	15.44	14.69	11.87	15.48	14.72	11.89	15.52	14.76	11.93	15.56	14.80	11.96	15.60	14.84	11.99	15.64
I <sub>mp</sub> [A]	13.59	10.87	14.39	13.69	10.94	14.48	13.79	11.02	14.57	13.88	11.10	14.67	13.97	11.17	14.76	14.07	11.25	14.85
<b>Module Efficiency</b>	<b>23.2%</b>			<b>23.5%</b>			<b>23.7%</b>			<b>23.9%</b>			<b>24.1%</b>			<b>24.4%</b>		

Product Specification

Cell Type	N-Type ABC
Front cover	2.0mm coated semi tempered glass
Rear cover	2.0mm semi-tempered glass
Frame	Black Anodized aluminum
Cable	4mm <sup>2</sup> (IEC) 12AWG(UL) ±1200mm
No. of Cells	120(6*20)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4-EVO2A
Weight	27.1kg±3%
Dimension	1954*1134*30mm
Package Detail	37pcs per pallet / 185pcs per 20'GP / 888pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I <sub>sc</sub>	+ 0.05%/ °C
Temperature Coefficient of V <sub>oc</sub>	- 0.22%/ °C
Temperature Coefficient of P <sub>max</sub>	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +70°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class A



www.aikosolar.com  
marketing@aikosolar.com

\*AIKO reserves right to update the specification without notice  
\*Optional Munich Re coverage is available upon request  
202604\_V3.1\_EN