

EHPT20X-MEHEW

FTC7 **Packaged** Cylinder
For Ecodan R290 Monobloc Units


R290

Key Features:

- A+ hot water efficiency
- Stylish and modern aesthetics
- Packaged hot water, heating and controls
- Colour touch screen control
- MELCloud enabled

Key Benefits:

- Minimised energy consumption
- Flexible product placement
- Plug and play simple installation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

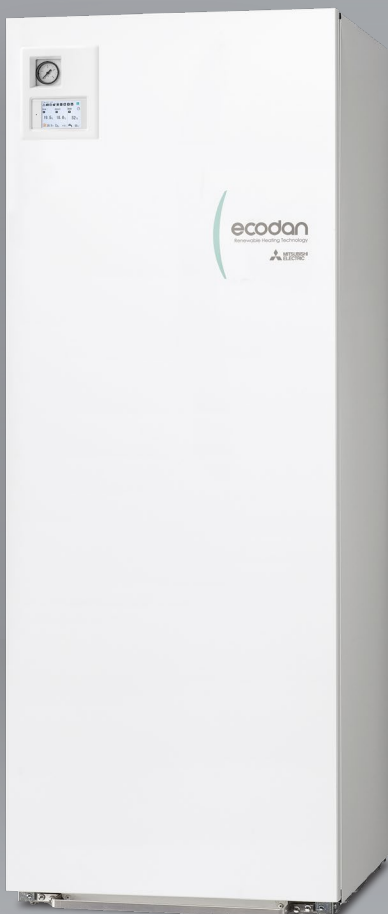**MELCloud**

ecodan[®]
Renewable Heating Technology


CYLINDER			EHPT20X-MEHEW
NOMINAL HOT WATER VOLUME (LITRES)			200
HEAT PUMP COMBINATION HEATER - Large Profile (Average Climate)		ErP Rating	A+
OPERATING AMBIENT TEMPERATURE (°C DB)			0 ~ +35°C (RH<80%)
SOUND PRESSURE LEVEL AT 1M (dBA)			28
WATER DATA		Flow Rate (l/min) - (H)WM 50 / 60 / 80	14/17/23
		Primary Circuit Pump	Grundfos UPM3 15-75 130
		Sanitary Hot Water Pump	Grundfos UPSO 15-60 130
		Connection Size (inch) Heating / DHW	G1 / G3/4
WATER SAFETY DEVICES	Heating Water Circuit	Control Thermistor (°C)	80
		Flow Sensor (minimum flow 5L/min)	Supplied
	DHW Cylinder	Control Thermistor (°C)	75
		Temp and Pressure Relief Valve (°C)/ (MPa (Bar))	90 / 0.7 (7)
DIMENSIONS (mm)		Width	595
		Depth	680
		Height	1600
WEIGHT EMPTY / FULL (kg)			81 / 287
ELECTRICAL DATA	Control Board - <i>optionally powered by outdoor unit</i>	Electrical Supply	220-240v, 50Hz
		Phase	Single
		Fuse Rating - MCB Sizes (A)*1	10
	Immersion Heater	Electrical Supply	220-240v, 50Hz
		Phase	Single
		Capacity (kW)	3
		Max Running Current (A)	13
		Fuse Rating - MCB Sizes (A)*1	16
MECHANICAL ZONES			DHW and 1 Heating Zone*2
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER			PAR-WT60R-E and PAR-WR61R-E Receiver

*1 MCB Sizes BS EN60898-2 & BS EN60947-2 *2 Optional 2 zone accessory pack available


Notes: Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Pumps & Valves for Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater.

EHPT20X-MEHEW DIMENSIONS


LEFT VIEW

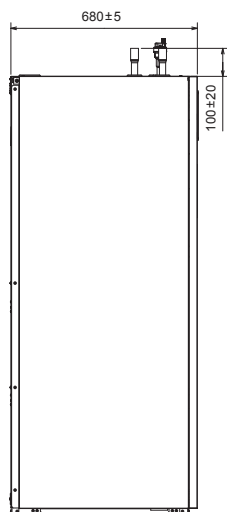


FRONT VIEW

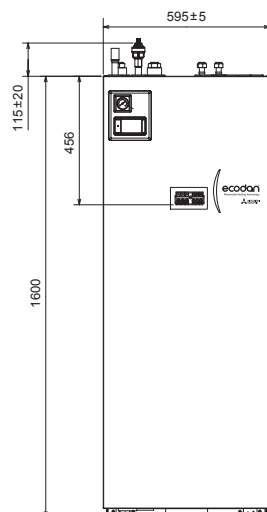

RIGHT VIEW

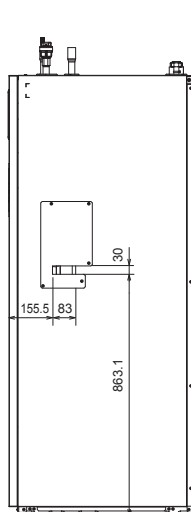

UPPER VIEW



Letter	Pipe Description	Connection size/type
A	DHW outlet connection	G3/4"/Compression
B	Cold water inlet connection	G3/4"/Compression
C	Space heating return connection	G1"/Compression
D	Space heating flow connection	G1"/Compression
E	Flow from heat pump connection	G1"/Compression
F	Return to heat pump connection	G1"/Compression
G	Electrical cable inlets	



Telephone: 01707 282880
email: heating@meuk.mee.com
ecodan.co.uk

[X](#) @Ecodanheating [in](#) Mitsubishi Electric Heating UK [f](#) Mitsubishi Electric Heating UK [ig](#) Mitsubishi Electric Ecodan [yt](#) Mitsubishi Electric Heating UK [BLOG](#) thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2023. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: Refer to 'Installation Manual' and 'Instruction Book' for further 'Technical Information'. The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of October 2023

